


HART Fieldbus Master

Overview:

HART® Field Communications Protocol is widely recognized as the industry standard for digitally enhanced 4-20 mA smart instrument communication. Use of the technology is growing rapidly, and today virtually all major global instrumentation suppliers offer products with HART communication.

Properties Screen Shot:

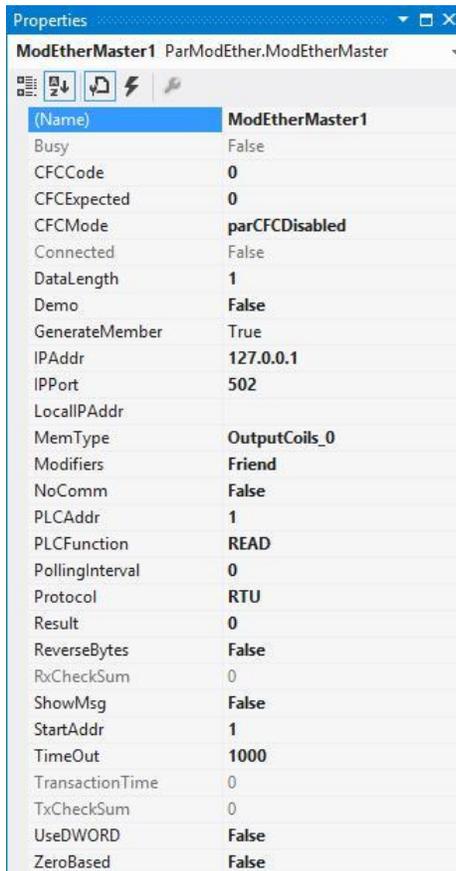

(Name)	ModEtherMaster1
Busy	False
CFCCode	0
CFCExpected	0
CFCMode	parCFCDisabled
Connected	False
DataLength	1
Demo	False
GenerateMember	True
IPAddr	127.0.0.1
IPPort	502
LocalIPAddr	
MemType	OutputCoils_0
Modifiers	Friend
NoComm	False
PLCAddr	1
PLCFunction	READ
PollingInterval	0
Protocol	RTU
Result	0
ReverseBytes	False
RxChecksum	0
ShowMsg	False
StartAddr	1
TimeOut	1000
TransactionTime	0
TxChecksum	0
UseWORD	False
ZeroBased	False

Features:

- Supports all the functions available for HART (Highway Addressable Remote Transducer)
- Renu Electronics Hart Gateway model GWY-800-B
- Easy to configure the HART Gateway
- Seamless communication through our Master Serial Driver to HART devices via HART Gateway.
- Multiple HART Devices can be connected
- Support most of HART commands for MODBUS mapping configuration

For More Info:

Overview of Parijat Drivers: [Click here](#)

8/18/2016

Copyright© Parijat Controlware Inc. Any other legal rights belong to their respective owners. Any usage here is only for reference purpose. Contents subject to change without notice.

9603 Neuens Rd Houston TX 77080. USA Tel: +1-713-935-0900 Fax: 713-935-9565 Email:

sales@parijat.com

www.parijat.com